


# Thermal Systems / Accessories

## Foot Mounting for asa rail system coolers




The foot mounting option is available for rail system coolers. The heavy duty design option is recommended for use on mobile machines and vehicles or other heavy duty applications with higher requirements regarding corrosion and mechanical stress. 1 set consists of 2 foot brackets with mounting material.


### ILLEFUSSTTK

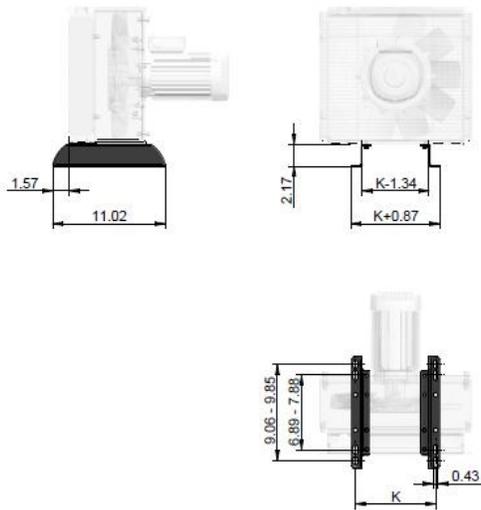

### ILLEFUSSTLK

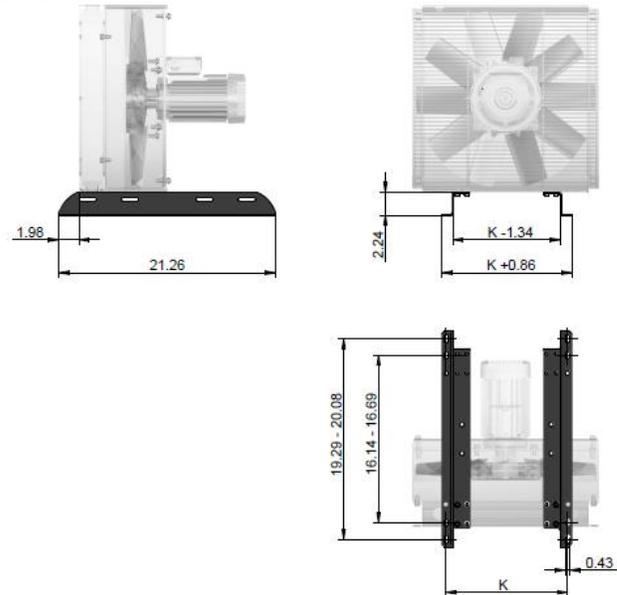

### ILLEFUSSTTHDK

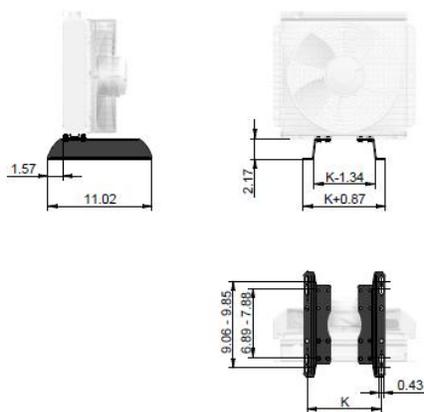

standard mounting set		heavy duty mounting set		long version mounting set	
cooler	$K_{min}$ [in]	$K_{max}$ [in]	cooler	$K_{min}$ [in]	$K_{max}$ [in]
TT 07	3.94	5.31	TT 07	5.31	5.71
TT 11	3.94	8.46	TT 11	5.31	8.66
TT 13	3.94	8.46	TT 13	5.31	8.66
TT 16	3.94	11.42	TT 16	5.31	11.81
TT 21	3.94	11.42	TT 21	5.31	11.81
TT 25	3.94	14.96	TT 25	5.31	15.55
TT 36	-	-	TT 36	5.31	22.05

order number	description	fits on cooler type								weight [lbs]
		TT 05	TT 07	TT 11	TT 13	TT 16	TT 21	TT 25	TT 36	
ILLEFUSSTTUK00	mounting feet set TT 07 – 25	-	•	•	•	•	•	•	-	2.7
ILLEFUSSTTHDKU00	mounting feet set TT 07 – 36 (heavy duty)	-	•	•	•	•	•	•	•	3.7
ILLEFUSSTTLKU00	mounting feet TT rail, long version	-	•	•	•	•	•	•	•	6.0

### Characteristics

bracket material steel

### Corrosion Protection

ILLEFUSSTTK comparable to C3 short (ISO 12944), Ri3 (ISO 4628-3)

ILLEFUSSTTHDK comparable to C5-M short (ISO 12944), Ri3 (ISO 4628-3)

ILLEFUSSTTLK comparable to C3 short (ISO 12944) Ri3 (ISO 4628-3)

### Delivery Content

foot mounting bracket 2x

mounting material included



This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-vL. General tolerances for casted parts according EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.  
 DD-ILLEFUSSTTK-ILLEFUSSTTHDK-ILLEFUSSTLK-us-rev0 © asa technology March 2021 page 1/1