


HighLine HL 1248 Oil / Air Cooler

230/400V 60Hz AC

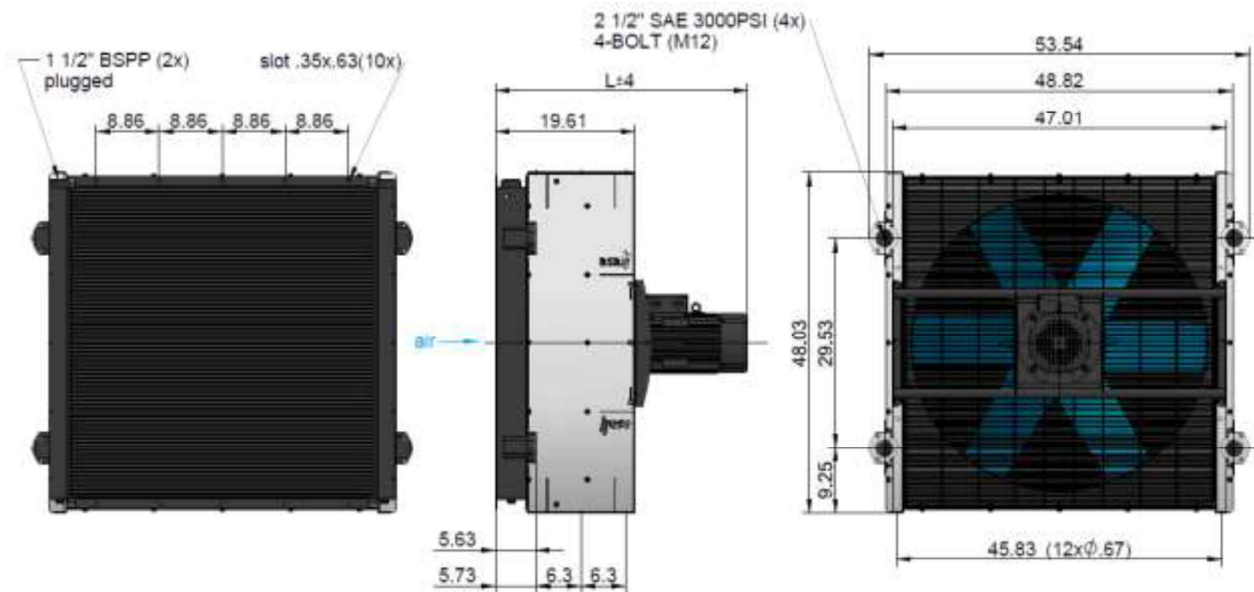

Technical Data


order number	description	motor power [HP]	current [A]	protection	rotation [rpm]	air flow [CFM]	noise level [dB(A)]	weight [lbs]	L [in]
ASA1248SA6EU00	HL 1248 230/460V 5.5HP	5.50	6.6	IP 55	1140	17372	95	575.4	35.47
ASA1248SA6GU00	HL 1248 230/460V 10HP	10.00	14.1	IP 55	1145	21089	94	676.8	39.41

Performance


specific cooling performance

all products
water/glycol
compatibel

Contact us!

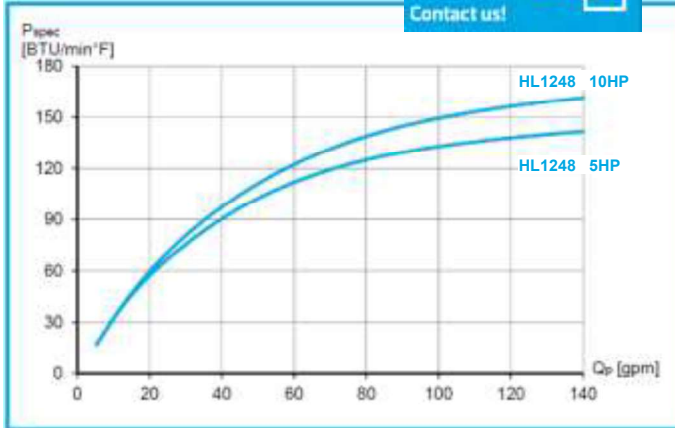

pressure drop at 150 SSU

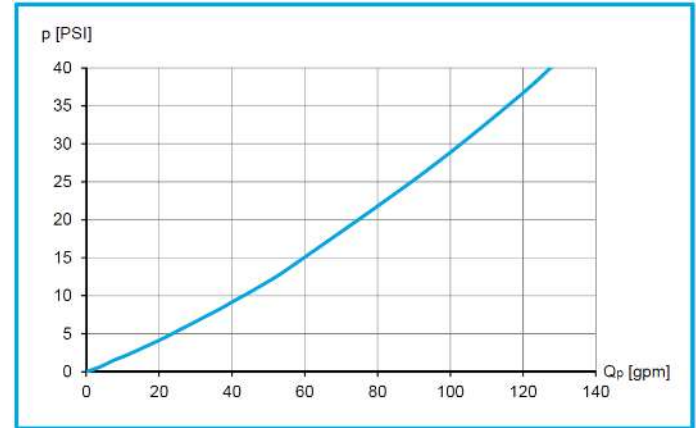

Radiator Style D

material:	aluminum
working temperature range:	-4°F to +212°F (oil temperature)*
air fin shape:	wavy
working pressure:	232 PSI




*...the indicated temperature is the maximum inlet temperature for the cooler radiator. Depending on the sealings in use, the application needs appropriate checking.

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-vL. General tolerances for casted parts according to EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

© asa hydraulik of America, February 2020

HighLine HL 1508 Oil / Air Cooler

230/400V 60Hz AC

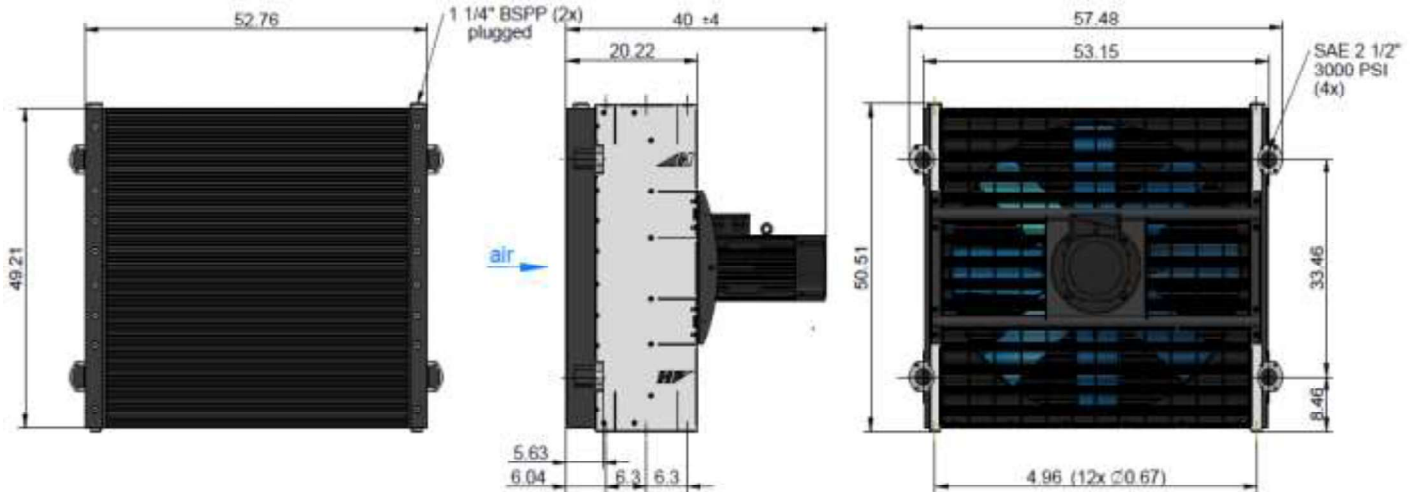

Technical Data


order number	description	pow	current	protection	revolution	air flow	noise level	weight
		[HP]	[A]		[rpm]	[CFM]	[dB(A)]	[lbs]
ASA1508SA6GU00	HL 1508 230/460V 60Hz 10HP	10	14.1	IP 55	1145	23195	97	769.4

Performance


specific cooling performance

all products
water/glycol
compatibel

Contact us!

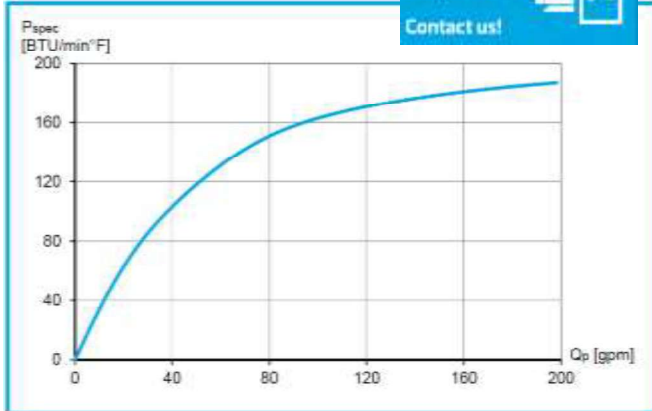

pressure drop at 150 SSU

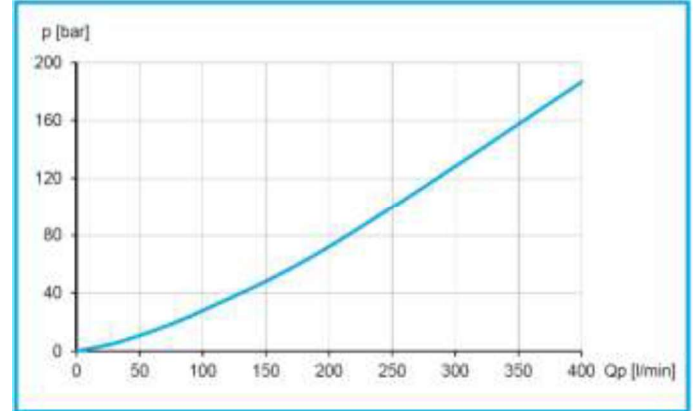

Radiator Style D

material:	aluminum
working temperature range:	-4°F to +212°F (oil temperature)*
air fin shape:	wavy
working pressure:	232 PSI (static)

*...the indicated temperature is the maximum inlet temperature for the cooler radiator. Depending on the sealings in use, the application needs appropriate checking.

Options

hydraulic fan drive	on request
---------------------	------------

